



WEISSENFELS

Aircraft Cargo Tie Downs


These high tensile strength tie downs are used primarily by the United States Department of Defense for securing cargo in transport planes. Over the years Weissenfels has been one of the primary suppliers of these critical application items.

NATIONAL STOCKING NUMBER (NSN)	DESCRIPTION	DESIGN RATING LBS.	MIN. LENGTH	WEIGHT EA. LBS.
1670-00-516-8405	10K A/C Cargo Tie down	14,100	108	7.5
1670-00-778-4079	25K A/C Cargo Tie down	35,350	108	22

*Supplied without ID tags unless quantity justifies special production


Packaging Commerical

Meets requirements of Mil-DTL-6458E

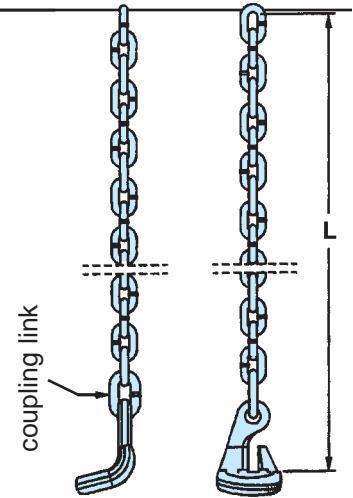

Agricultural Safety Chains

These safety chains are produced in accordance with ANSI/ASE S338.4. This standard covers the specifications for an auxiliary attaching system to retain a connection between towing and towed machines in the event of separation of the primary attaching system.

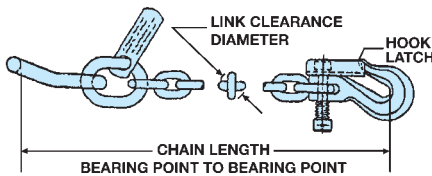

SIZE INCH	STOCK NUMBER	ASSEMBLY MIN. REACH (IN)	MIN. ULTIMATE STRENGTH
1/4	350-070-002	59	10,100
3/8	350-103-002	59	20,200
1/2	350-135-002	69	40,500
5/8	350-166-002	80	60,600

Hoist Chain

Weissenfels manufactures a variety of hoist chain for use on all types of hoists.

GRADES: Available in Hoist

Grades 5, 6, and 8.

MATERIAL: Alloy Steel

OTHER SIZES AVAILABLE ON REQUEST

For detailed specifications and availability of other sizes see our Catalog HOISTALLOY



MATERIAL		DIAMETER		LINK DIMENSIONS INSIDE		MAX. OUTSIDE WIDTH	LINKS PER FT.	WEIGHT PER 100 FT. LBS.
NOMINAL IN.	ACTUAL IN.	MM.	LENGTH IN.	WIDTH IN.				
1/8	.157	4	.472	.196	.539	25.4	24	
3/16	.196	5	.590	.236	.665	20.3	36	
1/4	.236	6	.708	.283	.795	16.9	54	
9/32	.275	7	.826	.330	.929	14.5	74	
5/16	.314	8	.944	.377	1.062	12.7	94	
3/8	.393	10	1.10	.472	1.338	10.9	148	
1/2	.511	13	1.41	.614	1.740	8.5	255	